




1200F

UNDER-RUN AGV
WITH FULL 360° SAFETY

The 1200F is a robust, fast and smart underrunning platform. Universal and flexible to use with a wide variety of standard carriers as well as tailored made racks and special load carriers.

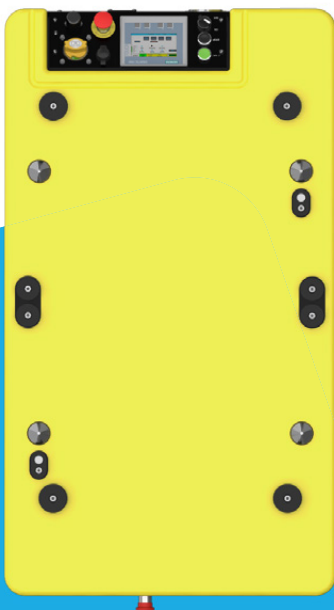

CONTACTLESS
CHARGING



5G TECHNOLOGY



CE CERTIFIED

SPECIFICATION

Device type	Under-run AGV
Manipulation	Lifting (130 mm)
Direction of drive	Bi-directional, on the spot rotation
Lifting height/type	130 mm/hydraulic
Load type	Pallets, racks, trolleys, automotive trolleys, customized
Max load	1,200 kg
Turning radius	0.7 m
Max speed	1.3 m/s (4.7 km/h)
Dimensions	W: 690 mm, L: 1251 mm, H: 353 mm
Weight	270 kg
Navigation	Contour
Manual mode	Manual steering, touchscreen [optional remote control, tablet, smartphone]
Safety scanners	SICK 2x 270° [2D scanner and 3D camera options]
Batteries	Li-FePO4, 48V/30Ah, maintenance free batteries

Asseco CEIT AGVs are available with their **own MCS control system** for guiding and monitoring logistics equipment in real time.

We offer a comprehensive **automatic logistics system, including AGV equipment, our own control systems and peripherals.**



asseco-ceit.com

E-mail: sales@asseco-ceit.com